


# Terrestrial Laser Scanning User Guide



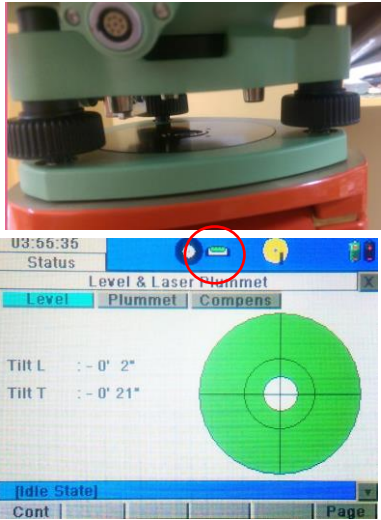
## - using Leica C5 TLS


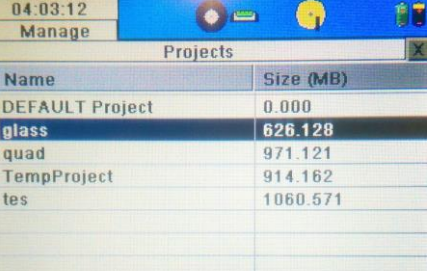
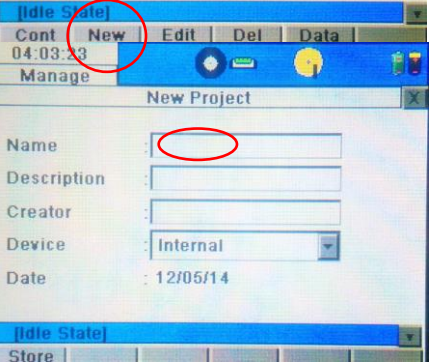
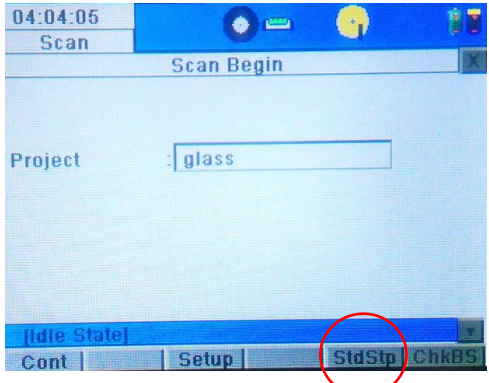
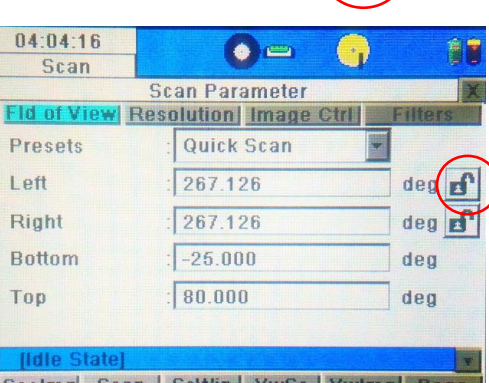
By Dr Bruce Harvey and Dr Craig Roberts

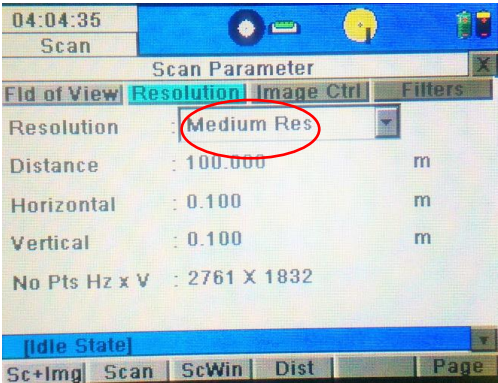

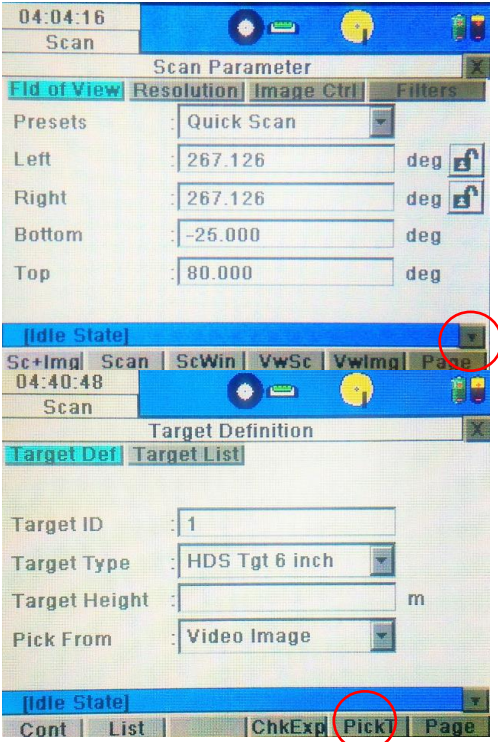
Surveying and Geospatial Engineering, School of Civil and Environmental Engineering, UNSW

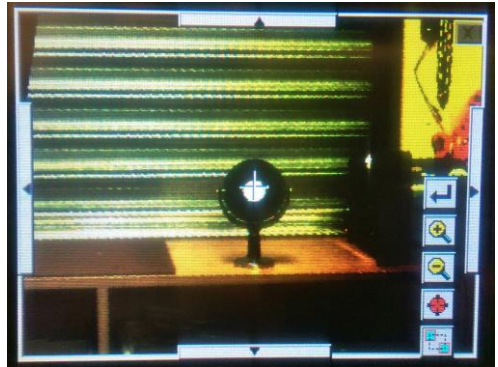


5-Sep-18 (Since 2015)

| Step | Action                   | Detail   | Picture   |
|------|--------------------------|--|---|
| 1    | Set up Scanner on tripod | Set up Scanner on a stable tripod.<br>Note the scanner weighs 14 kg so please be careful of your back when you lift it.<br><b>Never</b> let go of the handle until it has been screwed onto the tripod.<br><b>Level the bubble before powering on!</b><br>Check both batteries are inserted. |    |
| 2    | Power on                 | Press and hold power button on scanner for 3 seconds.<br>Wait about 3 minutes for the software to boot up. During that time a Windows screen will appear, wait until the Cyclone scanning software opens automatically.  |   |
| 3    | Adjust Level             | Use Stylus to click on bubble menu<br>Use 3 footscrews to adjust bubble so it is aligned at centre (green color)<br><br>Go back to Main Menu using X at top right corner   |  |

|   |                             |  |  |
|---|-----------------------------|--|--|
| 4 | <p>Create new project</p>   | <p>From Main Menu<br/>           Manage &gt; Projects &gt; New<br/>           (See pictures on next page)</p> <p>Name the project (click in the box and keyboard appears)</p> <p>Enter</p> <p>Store</p> <p>Go back to Main Menu (use X)</p> <p>These first 4 steps take about 10 mins.</p>   |    |
| 5 | <p>Set up angle to Scan</p> | <p>From Main Menu<br/>           Scan &gt; Standard set up &gt;<br/>           Field of view Presets &gt; Quick Scan</p> <p>Rotate the Scanner to face left side of the object area you want to scan</p> <p>(To know which way the instrument is facing stand behind it and point it at LHS of object, antenna should be on top RHS of scanner and screen on the RHS. You can see a spot bubble under the laser lens.)</p> <p>then press lock icon on screen</p> <p>Rotate again to the right side of object and press lock</p> <p>Adjust the depression angle(Bottom) and elevation angle (Top) by typing in the boxes. E.g. -25° means slope angle below horizontal +80° is angle above horizon [+90° is zenith and is not usually needed to scan sky outdoors!]</p> |    |

|   |  |   |  |
|---|--|---|--|
| 6 | Set up Resolution  | <p>Tap Resolution<br/>For beginners, start with Medium Res</p>  |  <p>The screenshot shows the 'Scan Parameter' menu with 'Resolution' set to 'Medium Res', which is circled in red. Other parameters include Distance: 100.000 m, Horizontal: 0.100 m, Vertical: 0.100 m, and No Pts Hz x V: 2761 X 1832. The bottom bar shows 'Sc+Img' circled in red.</p>  |
| 7 | Scan   | <p>Press Sc+Img for coloured point cloud i.e. with camera images (the files take longer to download than scan only data)<br/>OR<br/>Press Scan for point cloud i.e. scan only.</p> <p>[This takes about 5 mins for ¼ FoV]</p>   |  <p>The screenshot shows the bottom bar with 'Sc+Img' circled in red. Other buttons include 'Scan', 'ScWin', 'Dist', and 'Page'.</p>  |
| 8 | Select Target (if applicable, target types in table below) | <p>On bottom of the screen, click the down arrow to get next menu</p> <p>Target &gt; New</p> <p>Name Target ID e.g. 1 for the first or its campus point number - Enter</p> <p>Target type select e.g. HDS Tgt 3 inch<br/>Pick from: Video Image<br/>Click on PickT</p> <p>Put Cross-hair on screen at the centre of target. Turn the scanner in the direction of the target, use zoom (+) and pan (red button below (-) then click on part of image and that part moves to centre of screen), then point / click near the centre of the target. Doesn't have to be exactly at centre.</p> <p>Enter&gt;<br/>Cont</p> <p>The scanner should automatically do a fine scan of the target - Store</p> <p>Repeat the process to Register the next target e.g. 2</p> |  <p>The first screenshot shows the 'Scan Parameter' menu with 'Presets' set to 'Quick Scan' and various angle settings. The second screenshot shows the 'Target Definition' menu with 'Target ID' set to 1, 'Target Type' set to 'HDS Tgt 6 inch', and 'Pick From' set to 'Video Image'. The 'PickT' button in the bottom bar is circled in red.</p> |

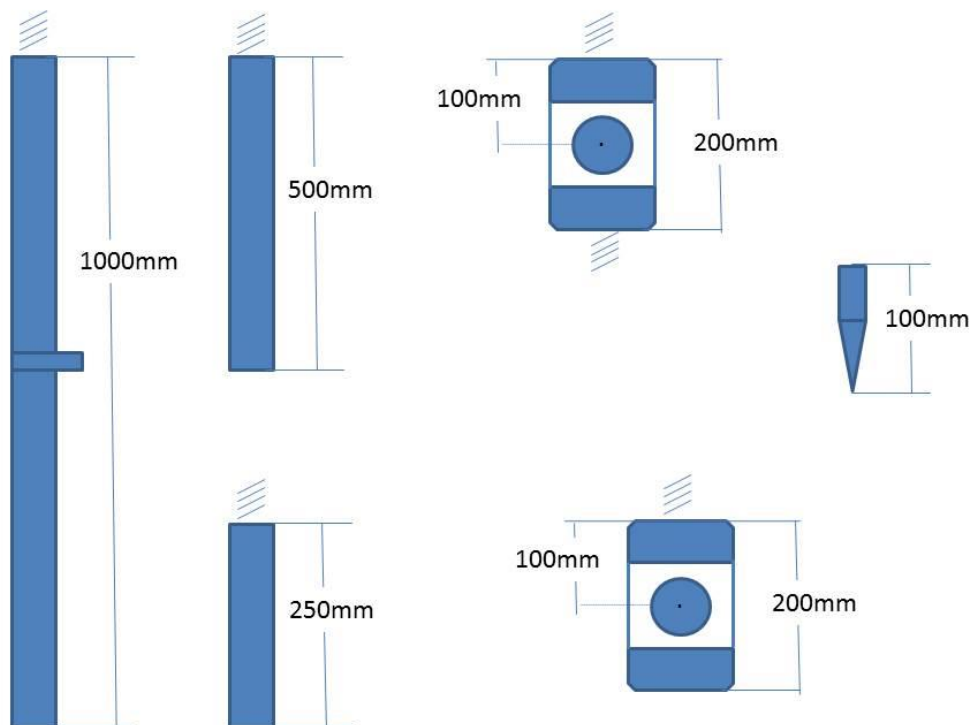
|    |  |  |   |
|----|--|--|---|
|    |  | <p>Repeat all parts of step 8 for all targets</p> <p>[Selecting 2 targets and fine scanning them takes about 25 mins for beginners.]</p>   |    |
| 9  | Download<br>(this step can be done later e.g. in the office) | <p>Press window close X until main menu appears. Plug USB stick into slot below on button.</p> <p>Tools<br/>Transfer<br/>Project<br/>Continue</p> <p>This will automatically open a directory on your USB called Scanner-Projects and place your project in this directory</p> | <p>Most (~95%) of the download time is for the images. A small quick scan survey at two set ups with narrow FoV can take 30 mins to copy to a good USB and e.g. 850Mb of files.</p> |
| 10 | Shut down  | <p>Use X to return to Main Menu, and X again. It asks if you want to power down.</p> <p>Yes. Wait until screen goes blank and motor stops. That takes about 1 min.</p> <p>If finished for the day, remove batteries and charge them.</p>                                       |   |

**Target Type:**

| Type           | Description  |
|----------------|--|
| HDS Tgt 6 inch | HDS 6" circular planar target  |
| HDS Tgt 3 inch | HDS 3" x 3" square planar target   |
| HDS Sphere Tgt | HDS 6" spherical target  |
| HDS B/W Tgt    | HDS 6" Black&White planar target   |
| Twin Tgt Top   | Top target of Twin Target Pole without extension. Target height automatically changes to <b>1.900 m</b> .    |
| Twin Tgt Btm   | Bottom target of Twin Target Pole without extension. Target height automatically changes to <b>0.200 m</b> . |

| Type         | Description   |
|--------------|---|
| Twin Top/Ext | Top target of Twin Target Pole with extension. Target height automatically changes to <b>2.150 m</b> .    |
| Twin Btm/Ext | Bottom target of Twin Target Pole with extension. Target height automatically changes to <b>0.450 m</b> . |

Note: The separate pieces of the twin target can be seen in the figure below.



Note: If you intend to setup the laser scanner over a known control point and use the Easting, Northing and AHD height, you will need to measure the height of the laser scanner over the point. You must use the plastic attachment in the laser scanner box and the specified tape measure. The plastic attachment must clip in place over one of the footscrews. The zero end of the tape is placed in the plastic attachment and the tape extended to the mark on a slant angle. A small plastic extension on the tape measure is opened out and touches the mark. The tape is specially calibrated to give the corrected vertical height to the centre point of the instrument – so simply read and record. (Check it with a standard 1:1 scale tape measure).