

Position Paper 2:

Adapting to climate change – implications for transport infrastructure, transport systems and travel behaviour

January 2011

Michelle Philp
Michael A. P. Taylor

1 Introduction

Scientific evidence identifies climate change as a serious global risk that requires immediate response from the global community (Stern 2006; Chapman 2007; IPCC 2007a, 2007b, 2007c; Garnaut 2008; Ball 2009). The extended effects of climate change and the actions required to adapt to evolving conditions will change the way individuals, communities and businesses function. Climate change needs to be addressed using a combination of mitigation and adaptation measures along with technological advances. Rigorous mitigation efforts are presently required to reduce the severity of future consequences to the climate. However, despite these actions, some degree of climate change is now unavoidable regardless of future reductions in emissions (IPCC 2007b). As a result, adaptation strategies are integral in climate change policy.

Climate change poses a significant risk to infrastructure and its owners, managers and operators (and, perhaps, users). The interconnectivity of urban systems means that negative impacts on one system could influence the functioning of another. Negative impacts on transport infrastructure have been shown to generate one of the widest spread set of implications across the functioning of various urban systems (Jollands et al. 2007). The Australian Federal Government has identified infrastructure as one of the national priorities for adaptation action (CoA 2010a). The key purpose for this precedence is to ensure that the owners and operators of nationally significant infrastructure, such as transportation infrastructure, provide continued and uninterrupted functioning of these assets, which are critical in supporting the national economy (CoA 2010a).

Recognition of the risks associated with climate change is required for better planning of new infrastructure and moderating potential damage to existing infrastructure. There is a need to undertake research into the likely impacts of climate change on Australia's transport infrastructure, establish the infrastructure most at risk and outline opportunities for adaptation responses, and examine the current governance structures. Then the administrative, legal and other issues that may impact on climate change adaptation can be identified.

This paper identifies the possible impacts of climate change relevant to the physical environment in which transportation systems operate and the possible risks and implications for transportation infrastructure, systems and behaviour in Australia resulting from climate change. The transport infrastructure investigated in this paper includes roads, ports and harbours, airports and rail.

The National Climate Change Adaptation Research Facility (NCCARF) is leading the research community in a national interdisciplinary effort to generate the information needed by decision makers in the government and vulnerable sectors and communities to manage the risks of climate change impacts. The Australian Climate Change Adaptation Research Network for Settlements and Infrastructure (ACCARNSI) is one of eight Adaptation Research Networks hosted by NCCARF. The aim of ACCARNSI is to initiate and develop effective strategies to respond to climate change through mitigation, adaptation and implementation. ACCARNSI brings together researchers and stakeholders with an interest in climate change adaptation for coastal settlements, public and private infrastructure, the built environment and urban and regional planning. The Urban Management, Transport and Inclusion node leads the exploration of the implications of projected demographic change in Australian cities and regions for future settlement form and in the critical assessment of integrated land use planning and transport policies in reducing emissions and adapting to climate change. For more information visit www.nccarf.edu.au.

This position paper is one in a series discussing current research and knowledge to further ACCARNSI objectives.

2 Climate change in Australia

2.1 Observed climate changes

The Bureau of Meteorology (BOM) has been collecting climate data across Australia for over 100 years (CSIRO & BOM 2010). The analysis of this significant data set has revealed long term trends and changes in the climatic observations around Australia. These analyses depict the changing nature of the Australian climate and illustrate the fact that climate change is not simply a future problem, but an issue that is already affecting our environment with impacts on human systems. Observed changes that have possible long term implications for transport infrastructure include (CSIRO & BOM 2007, 2010):

- the mean temperature across Australia increased by 0.7°C over the last 50 years. The regional variation of this trend was significant with some observed temperature increases recorded between 1.5 to 2°C over the same time period. This was compounded by an increasing number of hot days and decreasing number of cold days being recorded over the 50 year period. 2000-09 was Australia's hottest decade on record
- changes in rainfall patterns have also been observed in Australia over the last 50 years. In northern and central Australia, rainfall tended to be increasing, whereas in southern and eastern Australia the tendency is for decreasing rainfall
- Australian sea level monitoring observed an average increase in sea level by around 10cm from 1920 to 2000. More recently, in the period 1993 to 2009, Australian sea levels rose by 1.5 to 3mm per year in southern and eastern Australia compared to 7 to 10mm in northern and western Australia

2.2 Predicted climate changes

In order to develop appropriate long term adaption strategies, it is necessary to understand the long term predicted changes in the climate and the corresponding changes in the biophysical environment that may impact on transport infrastructure. The science of predicting future climate

change is relatively uncertain and relies on various models, assumptions and scenarios to generate indications of the future state of the climate. The impacts discussed following are indicative of the changes that may occur with climate change. The predicted changes for the Australian climate can be summarised from the leading climate science as (McLean et al. 2001; Nicholls & Lowe 2004; CSIRO & BOM 2007; Lynch et al. 2008; Maunsell 2008; Nicholls, 2008; Koetse & Rietveld 2009; CSIRO & BOM 2010):

Changes in temperature and frequency of other extreme events

Climate models are predicting an increase in the severity and frequency of extreme events. Lynch et al. (2008) in a study on the effect of climate change on extreme events defined extreme events as *'infrequent events at the high or low end of a particular climate or weather variable that is rare¹ at a particular place and time of year'*. These extremes include temperature extremes, heavy rainfall, drought, floods, hail, thunderstorms, tropical cyclones, bushfires, and extreme winds.

With increased frequency of extreme events it is more possible for concurrent climate extremes to occur, increasing the impact that would result from a single extreme event, for example (Lynch et al. 2008; Nicholls 2008):

- extreme winds accompanied by extreme rainfall. The rainfall weakens the hold of tree roots, increasing the likelihood that the tree would be uprooted in heavy winds
- extreme winds and high sea levels have the potential to significantly increase the risk of coastal inundation

There has been a lack of research into the risks and frequency of these joint climate event occurrences or to estimate the costs and impacts of concurrent events compared to singular events (Lynch et al. 2008).

By 2030 average temperatures are predicted to increase from 0.6 to 1.5°C from present. Temperature increases are expected to vary regionally with lower increases near the coast and larger increases in central and north-western Australia. Climate models also predict statistically significant decreases in cold days and nights, decreases in frost days and cold spells, and increases in extremely warm nights. There is an associated increase in the frequency and length of drought periods especially over southern Australia.

The predicted weather conditions result in a substantially higher fire weather risk, culminating with increased frequency of bushfires over a wider area.

Corresponding to warmer temperatures, evaporation is predicted to increase. Solar radiation is predicted to increase moderately in southern Australia especially in winter and spring. Combined with reduced precipitation it is expected that soil moisture is likely to decline over southern Australia.

¹ Rarer than the 10th or 90th percentile of the observed probability density function

Changes in precipitation

The number of days with no precipitation is expected to increase in the future, corresponding to a decrease in mean rainfall across Australia. However, it has been predicted that there will be an increase in intense rainfall events in many areas.

Climate projections also predict precipitation change in the form of decreased snow cover, shorter season lengths, decreased peak snow depths and changes in the timing of snow seasons.

Changes in sea level

The global average sea level is predicted to rise by 18 to 59cm by 2100. The melting of ice sheets could potentially contribute a further 10 to 20cm rise. Sea level rise and the associated increase in the frequency and intensity of storm surges and flooding incidences are perhaps among the most worrying consequences of climate change due to the tendency in Australia for concentrated populations in close proximity to the coast.

Sea level rise has a number of related biophysical impacts on coastal areas, resulting in inundation, flood and storm damage, wetland loss and changes, erosion, salt water intrusion, rising water tables which in turn impede drainage, and decline in soil and water quality.

Changes in coastal winds

Climate models also predict increased wind speeds in most coastal areas.

3 Implications for transport systems

To date, there has been surprisingly little research conducted in the public domain on the impact of climate change on transportation systems despite the likely widespread implications. The actual impacts of climate change on transport infrastructure will differ depending on the particular mode of transportation, its geographic location and its condition (Suarez et al. 2005). The possible implications of climate change on transport infrastructure in Australia are discussed in the following sections.

3.1 Infrastructure design, materials selection, operations and maintenance

The predicted climate changes outlined in Section 2 may push environmental conditions beyond the range for which transport systems and infrastructure were designed to handle. This in turn could necessitate changes in design, materials, and operating and maintenance practices. The relatively long design life of transport infrastructure means that the infrastructure designed today will need to be able to resist climatic pressures and extremes in 50 or 100 years from now (Meyer 2008; TRB 2008; CoA 2010a). However, adaptation of infrastructure is likely to only occur as structures reach the end of their design life, as such maintenance and operations impacts on existing infrastructure also need to be considered.

The potential impacts on infrastructure from climate change in Australia can be summarised as (USDOT 2002; Austroads 2004; CSIRO 2006; Meyer 2008; Maunsell 2008; Stevens 2008; TRB 2008; Evans et al. 2009; Jaroszweski et al. 2010; Chini et al. 2010 *in press*):

Changes in temperature and frequency of other extreme events

Temperature extremes increase the expansion stress and movement experienced on steel bridges and rail tracks, and also cause the expansion of concrete joints, protective cladding, coatings and sealants on bridges and airport infrastructure. High temperatures also result in the softening of asphalt and may lead to traffic related rutting. Pavement can also buckle under extreme temperatures.

Higher temperatures combined with increased solar radiation may reduce the life of airport tarmacs and asphalt road surfaces through an increase in the embrittlement of the surface seal. Embrittlement causes surface cracks to form such that water can infiltrate the road surface resulting in potholes and rapid loss of surface condition. Increased maintenance would be necessary to manage this phenomenon.

Temperature extremes and the general warming of the climate may also limit the undertaking of maintenance, construction and possibly operations activities due to heat stress conditions for workers for all transportation types.

The increased number of hot days is expected to have minimal impact on pavement or structural design in the short term (30 to 40 years), however a significant change would be required long term (40 to 100 years) on pavement and structural design, the substitution of materials, and a higher level of maintenance service.

Air transport will be impacted by increasing extreme events in a number of ways. Hazards associated with convective weather including thunderstorms with severe turbulence, intense up and downdrafts, lightning, hail, heavy precipitation, icing, wind shear, microbursts, strong low level winds, and tornadoes all impact on the operation and safety of aircraft and associated infrastructure. Higher temperatures affect aircraft lift, reduce engine efficiency and would require longer runway lengths. As such, extreme heat is likely to result in payload restrictions, flight cancellations, and service disruptions and could require airports to extend runway lengths.

Extreme weather events may also lead to increased port downtimes due to safety closures.

Changes in precipitation

Decreased precipitation, especially in southern Australia, has the potential to result in increased ground movement, changes in the watertable and associated increases in the salinity of soils. The combination of these changes has the potential to accelerate the degradation of materials, structures, reinforcement and foundations, reduce the life expectancy of the transport infrastructure, increase maintenance costs and may eventually contribute to structural failure when stressed by extreme climate events.

Significant flood damage to road, rail, bridge, airport, port and tunnel infrastructure may result from the increased frequency and intensity of extreme rainfall events. The magnitude and frequency of floods also plays an important role in the design and planning of transport infrastructure.

The short term impacts of precipitation changes relate to pavement and drainage design, foundation conditions, the approach used to estimate the design flood and the development of targeted

maintenance schemes. Longer term impacts may require changes in culvert design and the design and materials specifications of road subgrade.

Changes in sea level

Sea level rise and the increased potential for storm surge may affect transport infrastructure in coastal areas. Sea level rise in response to climate change is proposed to increase extreme water levels and wave heights, thereby increasing the potential for wave overtopping and flooding.

Port infrastructure as well as tunnels and culverts are particularly prone to damage due to increased tidal and salt gradients, ground water pressure and corrosion of materials. Sea level with respect to dock level is an important consideration for clearance of dock cranes and other structures. As such, any changes due to sea level rise could require some retrofitting of port infrastructure. As a result of climate change it is also predicted that the navigability of shipping channels is also likely to change. Some channels may be more accessible to shipping farther inland because of sea level rise others however, could be adversely affected by changes in sedimentation rates and the location of shoals.

In order to adapt to predicted sea level rise short term design changes are required to bridge height in vulnerable areas and the approach to predicting, planning and designing for storm surges. Over the long term in response to greater inundation of coastal areas there may be a requirement for setting more rigorous design standards for flooding and construction of infrastructure in saturated soils, and changes in materials specifications to cope with the corrosive nature of the coastal environment.

Changes in coastal winds

Airports, ports and bridges are highly susceptible to the predicted increase in coastal winds. Increased coastal wind requires action in the short term to update design factors for design wind speeds and testing of infrastructure designs under more turbulent conditions. Over the long term, current bridge construction materials may need to be substituted for those with greater strength.

Some research also indicates that the hot, dry conditions are likely to increase drying and loosening of unsealed road surfaces and when combined with increased wind there exists the potential to increase dust storms impacting usability of the road and resulting in additional maintenance costs, environmental impacts through the smothering of vegetation, and social impacts due to dust infiltration of residential properties.

3.2 Economic

Transport infrastructure represents a significant asset and can have broad interactive economic effects. Transport infrastructure also plays a critical role in attracting foreign investment and supporting national social, cultural and economic stability, productivity, development and prosperity (Ng & Loosemore 2007; Lakshmanan 2010 *in press*). The direct economic costs associated with the impact of climate change on transportation systems relate to the monetary cost of preventative measures and repairing or rebuilding damaged infrastructure. Analysis of direct disaster costs on a global scale has shown that the annual direct losses from significant natural catastrophes increased over 10 times from the 1950s to the 1990s, with these costs inflated by another factor of two when damage from lesser weather events are included (Munich Re 2000; Auld et al. 2006). In the Australian context, a review of natural catastrophes between 1980 and 2008 showed that for the

decade 1999 to 2008 insured losses almost doubled the losses recorded for the previous two decades (Munich Re 2009).

Climate change has been identified as one of the contributing factors to increasing event costs, along with (Auld et al. 2006; Lynch et al. 2008; Munich Re 2010):

- population growth
- urbanisation of vulnerable regions
- the concentration of population and assets
- improved living standards
- vulnerability of modern technology systems and societies reliance on uninterrupted service
- increased insurance
- global networking e.g. tourism

The greatest public costs have been found to be related to disaster assistance, and road maintenance, relocation and repair (Middlemann 2007).

Aside from the direct costs related to infrastructure damages, substantial indirect costs are likely to be experienced due to network effects including costs due to delays, losses from toll roads, freight supply interruption, detours and trip cancellations (Middlemann 2007; Maunsell 2008; Koetse & Rietveld 2009).

3.3 Planning

As climate change alters the biophysical environment and impacts on the environmental serviceability of urban systems, planning principles and practice will play an important role in adaptation to climate change complementary to the design, maintenance and operation of transport infrastructure. Climate change adaptation measures must include planning to reduce vulnerability and/or increase resilience with respect to climate change through the development, analysis and revision of planning systems and practices. Land use planning can provide a powerful tool to help reduce the loss of life, property, and assets. Burch (2010) suggests that land use zoning is the single most powerful regulatory instrument, however the effectiveness of this tool is severely restricted through a lack of coordination between interdependent groups.

Aside from the effects of climate change, Section 3.2 identified the causes of increased costs due to natural disaster damages which included increased urbanisation and the expansion of urban areas into vulnerable regions with a likelihood of increasing exposure to risk (Auld et al. 2006; COAG 2007; Lynch et al. 2008; Munich Re 2010). The eventual impacts of climate change will vary depending on the form of the settlement, geographic considerations and the nature of the local economy (COAG 2007). Through efficient planning, the threat of climate change impacts to transportation systems can be minimised by separating infrastructure and the associated population and resources in high risk areas such as floodplains and coastal zones threatened by inundation.

Brown et al. (1997) provide an example of efficient planning to reduce the impact of flooding associated with extreme storm events. This study compared the impacts from storm events in Michigan, USA and adjacent Ontario, Canada. The comparison found that non-agricultural flood damage in Michigan exceeded the damage in Ontario by a factor of approximately 900, despite the fact that the flood magnitudes experienced in Ontario were greater than Michigan. Further analysis

revealed that this was due to the differences in land use planning systems applied in the two cities, where Michigan had a lower threshold for residential development in flood prone areas. This example demonstrates how land use planning can significantly reduce the impact and damages related to climate change, and how Australian planning systems need to evolve in response to climate change (as well as concurrent changes in demographic and settlement patterns).

3.4 Liability and insurance

The increasing frequency and severity of extreme climate events impacting on transport infrastructure and systems has the potential to produce a corresponding increase in the risk of potential accidents involving property damage, injuries and fatalities (CSIRO 2006; Middlemann 2007; Maunsell 2008). This impact will in turn increase the potential liability and insurance costs to transport authorities, managers, operators and owners.

Insurance and financial markets disperse the risks of climate change impacts across a wide base of industries, communities, regions, and countries, moderating the losses experienced by particular groups of people. Climate change poses new challenges for these markets by widening the probability distribution of possible losses and increasing the severity of damages and payouts (Garnaut 2008).

CSIRO (2006) conducted an infrastructure and climate change risk assessment for Victoria and determined that *'it is the ultimate owner of any piece of infrastructure who must ensure that it is designed to operate effectively for its design life, since they will bear the primary liability in the event of failure'*. This study also found that many of the risks identified for transport infrastructure, inclusive of those listed in Section 3.1, are covered under existing insurance arrangements. The dilemma lies in the likelihood that as the understanding and occurrence of climate change impacts increases, insurers may act to reduce their potential exposure through limitations in event coverage. If insurance claims greatly increase as a result of severe weather events, then highly correlated risks across regions may overwhelm the ability for the industry to provide insurance coverage (Garnaut 2008).

Conventional insurance is of limited value when there are similar impacts over wide areas (e.g. sea level rise) or when uncertainty involves the timing rather than the extent of an impact. There may be a requirement for developing new insurance products using the principles of traditional life insurance i.e. life insurance covers the risk of timing of death, although the fact of eventual death is itself certain (Garnaut 2008). Land use planning mechanisms, as described in Section 3.3, may act to improve insurability and minimise pressure on the insurance sector. Insurance companies may also opt to provide adjustments to insurance premiums for risk reducing behaviour as incentive for households and businesses to actively take adaptation measures.

3.5 User behaviour

There also exists the potential for climate change to impact on the way people use transportation infrastructure with shifts in demand in response to climate factors, and in their travel behaviour.

Climate change may result in shifts in demographics as currently populated areas become less desirable, and tourism markets, production and industries shift according to the impacts of climate change, such as excessive heat or coastal inundation (USDOT 2002; TRB 2008; Koetse & Rietveld 2009). These shifts in turn have implications on transport demand and patterns, infrastructure maintenance and operation on a local, regional and global scale.

Travel behaviour also varies according to weather conditions. Research has revealed that an overall reduction in traffic volume in Melbourne of 2 to 3 per cent occurs in response to 2 to 10mm of rain during daytime (Keay & Simmonds 2005). Increased extreme precipitation events therefore may increase pressure on alternative transport modes.

Adverse weather conditions are also a recognised risk factor known to affect crash rates in Australia (Rowland et al. 2007; Koetse & Rietveld 2009). Rain and wet road conditions have been found to be significant contributors to road fatalities and crashes as a percentage of the total road toll in Australia (Rowland et al. 2007). This correlation suggests that the changes in driver behaviour under adverse conditions are insufficient to account for the resultant hazards such as reduced road/tyre friction, loss of vehicle control and poor visibility (Edwards 1999; Unrau & Andrey 2006). Koetse and Rietveld (2009) summarised that adverse weather conditions resulted in substantial reductions in traffic speed and travel time reliability, and increased travel time. Stern and Zehavi (1990) also found substantially increased risk of an accident, particularly in single vehicle accidents, under heat stress conditions induced by extremely hot days and heat waves. The increased risk for bushfires may also alter driver behaviour due to a reduction of visibility due to smoke (TRB 2008). Driver education and increased deployment of advisory systems have the potential to provide an adaptation mechanism for user behaviour in the changing climate conditions.

3.6 Emergency evacuation, transport network and vehicle function

As discussed in the previous section, climate change will affect the function of traffic systems by reducing traffic speed and volume, increasing travel time delay, and decreasing roadway capacity. The functioning of traffic systems will be further hampered by the impact of climate change conditions on the efficiency and functioning of vehicles. Increased temperatures are predicted to result in more vehicle overheating and breakdowns, and lead to faster tyre deterioration resulting in blow outs, thereby further increasing traffic disruptions (TRB 2008; Evans et al. 2009; Jaroszweski et al. 2010).

Predicted increases in hot days and heat waves attributed to climate change are likely to impact on vehicle efficiencies. Warming conditions are proposed to lower engine efficiency resulting in increasing fuel use, which is amplified further by the increased use of air conditioning in vehicles (TRB 2008; Evans et al. 2009). Also, as discussed in Section 3.1, aircraft performance may also be negatively impacted under a warming climate.

A robust transport network is required to offer alternative travel paths to ensure the effective functioning of the system. In urban settings there tends to exist access to alternative paths. In rural settings however, the road networks are sparser with fewer good quality alternative roads. The failure of one particular link within a rural road network potentially has significant effects on the community (Jenelius et al. 2006; Susilawati & Taylor 2008).

A robust transport network is essential in order to accommodate emergency services and planning particularly with respect to emergency evacuations. The increasing occurrence and severity of extreme weather events including cyclones, coastal inundation, bushfires and floods may result in the increased frequency of evacuation potentially over larger areas, with risks exacerbated by increasing populations in exurban areas, and especially in coastal zones. Understanding the local implications of climate change will be essential in the future planning of emergency services (Garnaut 2008). In the past there has been little research focussed on increasing the efficiency of evacuation due to the low demand for

evacuations and the perception that the evacuation of a major city would create demands that would overwhelm the capacity of the transport infrastructure (Wolshon & Meehan 2003). Past and present practice has tended to disregard evacuation considerations in transport planning, design and analysis.

Emergency evacuations in Australia generally take place in response to natural disasters, most commonly for bush fires, floods, and occasionally cyclones (Taylor & Freeman 2009). Travel during evacuations is very different from the day-to-day travel used in conventional urban transportation planning due to a combination of factors, including long travel times, high levels of extended congestion, uncertainty of road conditions, and the possibility that destinations may change in response to conditions on route (Fu & Wilmot 2004). Evacuation rates are influenced by official orders as well as personal evaluations of a wide variety of risk factors including, but not limited to, demographic characteristics, risk sensitivity, social ties, information and perceived threat (Dow & Cutter 2002; Fu & Wilmot 2004; Taylor & Freeman 2009). Traffic flow during evacuations can be less than the normal daily commuting conditions with highway flow reduced because of evacuees' tendency to heavily load vehicles or to pull trailers (Dow & Cutter 2002).

In 1999, Hurricane Floyd triggered the evacuation of 2.6 million coastal residents from five states in the USA (Wolshon & Meehan 2003). The issues apparent during this evacuation caused the realisation of the importance of improving evacuation operations, and since this event there has been increased emergency evacuation research and planning in the USA, see for example Fu and Wilmot (2004). However, the experiences from Hurricane Katrina suggested that much remains to be done as discussed further in Litman (2006) and Lindell and Prater (2007). Research on transport implications remains limited.

The following list summarises some of the practices that can be applied to traffic systems to increase the resilience of transport systems in emergency conditions (Wolshon & Meehan 2003; Litman 2006; Sohn 2006; Yuan et al. 2006; Murray-Tuite 2007):

- contraflow strategies, where lanes and shoulders are reversed to increase conveyance in the dominant direction, have been shown to potentially increase the outbound volume by approximately 70 per cent. Similar strategies can also be applied to assist in maximising evacuation flow including coordination of traffic signals on parallel arterial roads, use of public transport systems especially to assist low mobility community members, and limiting interruptions to flow at rail crossings and drawbridges
- deployment of intelligent transportation systems with multi-jurisdiction coordination in urban areas, and supplementary advisory services to assist rural areas in order to inform drivers of the most efficient evacuation routes as conditions change
- removing any limitations imposed in road work areas to minimise delays
- staggering departure times for groups of evacuees
- special routing consideration for heavy vehicles
- improving the transport network by adding redundancy i.e. alternative paths
- include disaster response as part of all transportation planning
- develop an adaptive emergency action plan that identifies who will do what during disasters
- design transportation facilities to withstand extreme conditions
- develop effective communication systems among transport system staff, and with the public

- develop the ability to prioritise transport system resources when necessary to give priority to emergency and service vehicles
- design critical components of the transportation system to be fail-safe, self-correcting, repairable, redundant, and autonomous

Important research is required in emergency planning, management, response and recovery regarding cultural considerations associated with communicating warnings and response advice, governance issues associated with responsibility and jurisdiction, and research into the organisation and the geographic scale of covering risk.

4 Governance of Australian transport infrastructure and barriers to developing adaptation responses

Stecker et al. (2010) assessed the current state of adaptation of transport and energy utilities in Germany, and explored several hypotheses about potential barriers to adaptation. The study revealed two central issues hindering current and future adaptation actions: adaptation is not simply an individualistic private issue; and knowledge gaps impede action in the present. In September 2009 a workshop was conducted in the USA, bringing together transportation industry stakeholders from five states to discuss climate change adaptation and mitigation from a transportation perspective (Winkelman et al. 2009). Discussions at the workshop revealed that regardless of jurisdiction, all transportation stakeholders were experiencing the same barriers to climate change adaptation and mitigation which were summarised as (Winkelman et al. 2009):

- general lack of knowledge on the need to adapt infrastructure for climate change impacts and which adaptation methods should be applied
- governance and communication barriers that prevented cooperation between stakeholders and were in some cases causing agencies to work at cross purposes
- limited funding for planning and implementing adaptation measures

As discussed in Section 3.4, in Australia it is the ultimate owner of any piece of infrastructure who must ensure that it is designed to operate effectively for its design life, since they will bear the primary liability in the event of failure (CSIRO 2006). Responsibility for transport infrastructure in Australia is decentralised and shared between the public and private sectors. The control and expertise required for making decisions regarding climate change adaptation measures for transportation infrastructure are therefore dispersed among multiple levels of government, various authorities and interest groups. These factors raise governance issues with respect to the development of adaptation strategies. Governance is the term used here to refer to the political and legal structures and mechanisms used to manage and coordinate transport systems, how they interrelate, how resources are allocated and outcomes are achieved. The current governance structures that exist in Australia with implications for transport infrastructure can be summarised as (CoA 2010a, 2010b):

- the Australian Federal Government has stewardship of the national economy and broad interests. As climate change will impact on virtually every sector of the economy and society, the federal government must perform a leadership role in adapting Australia to the climate change impacts with direct implications for the economy and Australia's security. With

respect to transportation systems, the federal government has specific interests in major land transport networks in relation to their contribution to the productivity of the nation

- State and Territory Governments are responsible for the majority of legislation related to climate change adaptation measures for transportation infrastructure. Metropolitan land use planning, the importance of which is discussed in Sections 3.3 and 3.4, and urban roads and transport have largely been the responsibility of state and territory governments. States and territories fund infrastructure mainly through transfers from the federal government but also from state taxes such as stamp duty
- Local Governments will be key actors in adapting to the local impacts of climate change and engaging in ground level works. Local governments generally have planning authority over land use zoning. Funds for local government to provide infrastructure are sourced from local land rates, and through levies and grants from the other two higher levels of government

Each level of government also undertakes differing and complementary roles in climate change adaptation including (COAG 2007):

- integrating climate change into existing policies and strategies
- establishing and maintaining community and essential services addressing climate change impacts
- building Australia's adaptive capacity, through the provision of tools and information, raising awareness of adaptation options, educating key professionals and investing in climate change science as well as related social, ecological and economic studies
- managing risks from climate change to government managed infrastructure

A governance framework is required to assist all involved parties to work together effectively and prevent maladaptation. Three general frameworks can be described for the purpose of transport infrastructure adaptation to climate change:

- federal government driven adaptation program where the federal government would take the lead in identifying, commissioning, and coordinating adaptation actions of national interest
- bottom up, largely self driven adaptation with decentralised adaptation planning and action and without significant federal involvement (current framework for adaptation efforts)
- intermediate adaptation program where adaptation planning and actions are decentralised but the federal government plays a significant role facilitating and coordinating, providing information and technical resources, and dynamic evaluation of risk to infrastructure

The America's Climate Choices report (NRC 2010) considered each of these adaptation governance frameworks and found that the intermediate approach was the strongest approach, as it incorporates all levels of knowledge and expertise. Each level of government has different responsibilities and therefore will play different roles in adapting Australian transport infrastructure to the impacts of climate change. Preparation to deal with climate change impacts will require a whole of government approach to adaptation planning, engaging all levels from federal to local according to the resources and capacity available and to empower private industry and individuals to facilitate the adaptation process (Lynch et al. 2008). The establishment of facilities such as NCCARF (www.nccarf.edu.au) and the development of a national sustainability rating scheme for

infrastructure projects (www.agic.net.au) in Australia may suggest a shift from the bottom up approach to an intermediate governance framework.

Input required will be a combination of direct actions, including the management of federal transportation assets, and indirect efforts through the coordination of national reform effort. State, territory and local governments deliver more direct services and manage more assets than the federal government, and as such will have to play a bigger role in direct adaptation actions.

Garnaut (2008) proposes that there should be direct government intervention by developing a national policy response in order to:

- facilitate understanding with respect to climate change, its impacts and the options available to respond
- develop capacity in the community to use this information to address climate change
- deal with events that are beyond the community's capacity to address
- use a market approach to create options for individuals and businesses to manage climate change risk

The market approach to climate change has been proposed on the principle of free markets where vulnerable individuals have a direct incentive to adapt. There are several reasons why the market approach could fail and in these cases government intervention will be required (Biesbroek et al. 2010 *in press*):

- lack of knowledge – if relevant actors are not sufficiently aware of the potential environmental changes, of the need to adapt or of the available adaptation options
- lack of capacity – if actors do not have sufficient capacity for timely adaptation, whether in terms of money or workforce
- lack of (self-)interest – if ability and responsibility to adapt do not lie with those who are negatively impacted by climate change, or if long term effects are not taken into account due to short term economic considerations
- lack of consensus – if multiple actors have to cooperate in order to achieve effective results

These failure mechanisms for the market based approach correlate closely to the current barriers preventing adaptation of transport systems and infrastructure in the USA identified in the workshops discussed previously (Winkelman et al. 2009). The generic nature of these barriers and the comparative nature in the governance, urban form and social structures between the United States and Australia suggest that these barriers are also likely to be present in the adaptation of Australian transport infrastructure to climate change (Luten 2006; Philp & Taylor 2010).

The Council of Australia Governments (COAG) may be the appropriate governance pathway for facilitating climate change adaptation where a number of government levels must act or for issues where national leadership is required. In December 2009 COAG agreed to a set of reforms for national criteria for capital city strategic planning with the aim to ensure there are long term plans in place to address issues such as climate change. The federal government intends to assess funding for future infrastructure decisions according to whether the criteria have been met in the jurisdiction in question.

5 Developing adaptation responses for transport infrastructure

Garnaut (2008) states that one of the most significant adaptation challenges for the Australian community is to respond to the immense potential impacts of climate change on the basis of imperfect information. The total impact, distribution and damage due to climate change and its distribution strongly depends on the adaptive policy chosen (Tol 2002). The success of an adaptation strategy depends on how that action meets the objectives of adaptation, and how it affects the ability of others to meet their adaptation goals. The three cornerstones of adaptation have been described by the requirement to (Adger et al. 2005):

- reduce the sensitivity of the system to climate change
- alter the exposure of the system to climate change
- increase the resilience of the system to cope with changes

In developing adaptation strategies it is critical to understand what the fundamental objective of adaptation is, not only for transportation infrastructure and systems, but for the population as a whole. The concept of resilience has been growing in momentum as the desired overall outcome for climate change adaptation of human systems. Resilience is a concept borrowed from ecological systems, and has been defined in the context of urban systems as the capacity to accommodate, or successfully adapt to external threats such as the impacts of enhanced climate change (Hamin & Gurran 2009). Adaptation strategies are one of the tools required to reduce the vulnerability of urban systems to external threats, thereby limiting the impacts of climate change. For transport systems, vulnerability must consider the susceptibility of the network to disruptions or degradation that will significantly reduce the efficiency or capability of the operation of the transport system, and the impacts this degradation could have (Sohn 2006; Taylor 2008; Freeman et al. 2009). Further complexities of adaptation include the diversity of adaptation strategies available and determining how and when they should be applied.

5.1 Assessing transport systems and infrastructure vulnerability to climate change

The current approach to urban road network planning and management tends to be reactive, addressing problems as they arise (Taylor 2008). Vulnerability analysis can be used as a pro-active approach to anticipate structural weaknesses and vulnerabilities and help to avoid their negative impacts before they occur. Vulnerability assessments are proposed to provide the information necessary to make practical decisions for adapting transport infrastructure to climate change at the appropriate spatial scale. The origin of vulnerability assessments lies in impact assessments and hazard research, and has been recently applied to map potential climate change impacts and to develop strategies to facilitate adaptation (Fussel & Klein 2006; Naess et al. 2006). Vulnerability, in terms of transportation networks, considers the susceptibility of the network to failure of a component of the network that significantly reduce the operational ability of a transport system, and the resultant impacts (Taylor 2008; Freeman et al. 2009).

Assessment and prioritisation of adaptation strategies should be conducted considering both the costs and benefits of the economic investment required, with respect to the consequences arising from accessibility restrictions imposed by loss of transport links (Stevens 2008).

5.2 Framework for adaptation planning

The implications of climate change for transportation infrastructure and systems discussed in this paper are provided in the general Australian context. The actual impacts of climate change are likely to have considerable variation on a regional and local scale. Adaptation measures will have to take this spatial variation into account with localised approaches. This however requires an understanding of localised impacts which in turn requires a framework for risk assessment of transport infrastructure under climate change. Decision support tools are needed that allow planners and policy makers to assess the threats to infrastructure, the consequences of network degradation and failure at various locations and under different circumstances, and what to do about these (Taylor & D'Este 2005).

There are few adaptation actions available that completely resolve the risk associated with climate change and as such, two types of adaptation actions are required: to respond before infrastructure is impacted; and to deal with the consequences where infrastructure is affected. By developing and efficiently applying such strategies, the damage associated with climate change can be significantly reduced. Economic and other constraints however may limit the application of these pre and post impact adaptation strategies, for example, where there are economic constraints on the retrofit of transport infrastructure not all links can be retrofitted at once (Sohn 2006). As such, a systematic way of assigning the priority of certain links is required to minimise disruption to the transport network. Decision support systems can perform this function.

Decision support systems are designed to assist in planning decisions where future conditions are uncertain or can change rapidly. Decision support tools are needed by managers, policy makers and planners to assess the level of risk to a wide range of values and assets, and also to assess the suitability of alternative management strategies.

5.3 Adaptation planning example - defining a decision support system for evacuation planning

Decision making in emergency planning is typically a very complicated process dependent on a variety of data types, information and knowledge where generating and deciding upon alternative plans is not a simple task. This process is further complicated by the uncertainty of the future impacts related to climate change. The following section demonstrates the application of decision support strategies to emergency management and evacuation.

A specification for a decision support system for emergency management and evacuation planning can be written as follows. For a simple macroscopic model that can provide planning guidance for the evacuation of people from threatened areas to safe designated shelters outside or inside the threatened area, the following model features are required:

- the simplicity of the model should not be achieved at the expense of reliable results and appropriate detail
- the model should be dynamic in updating both the state of the emergency and the levels of road access, traffic conditions, volumes, travel times and (if appropriate) queuing
- the model needs to include and provide realistic measures of intersection, link and network capacities. This must include specific realisation of the capacity and characteristics of traffic flow on two-way two-lane roads with restricted sight distances

- the model requires the capability to evaluate the impacts of future land use plans and population distribution and intensity on evacuation times and rates
- the model must include good representation of the behaviour of individuals
- the major application of the model is for strategic planning, based on scenario studies for different natural disasters (including intensity and location) under a range of environmental and meteorological conditions
- the outputs will be used to inform and assist the strategic planning processes in a locality, in conjunction with local knowledge and available professional expertise
- the model should be developed in a dynamic GIS software platform, including and integrating accurate road network, terrain and topography, land use and population, and vegetation, environmental and meteorological databases

The vital position of dynamic GIS as the underlying software platform support for the model has already been identified, as discussed in papers such as Ahola et al. (2007). Given the existence of comprehensive and accurate data on physical characteristics (e.g. terrain, topography, vegetation and environment), demographics and land use, infrastructure and facilities (e.g. road networks, water supply and electricity distribution), the GIS platform provides the means to integrate the databases and to host the different computational models. There is an underlying requirement for up to date spatial data derived from remote sensing systems to assist in this process. In addition, the road network model attached to the GIS is used to determine both shortest paths from inhabited zones to shelters and also 'second-best' paths. Similar path calculations would be made for use by emergency services when seeking to reach any specified locations. Path determination is done initially for the normal, full and intact network as the base case.

Disaster scenarios may then be simulated for different scenarios, using a model such as Phoenix to simulate bushfires (Tolhurst et al. 2008), to be run with different meteorological conditions and fire ignition points. The paths and impacts of the simulated fires can then be used to determine the likely consequences for the road network. In the case of bushfire modelling, the analysis would be undertaken from two perspectives. First would be the identification of likely 'weak spots' in the road network, being links and road sections most likely to be affected (i.e. degraded or closed) by fires. Second would be the identification of resilient links and road sections, being those parts of the network least likely to be affected by fires. That is, both network vulnerability and network resilience are important considerations. Outputs from the model would include qualified advice about most reliable evacuation routes – and access routes for emergency services. Qualification of the advice is necessary because of the significant stochastic variations in circumstances inherent in the natural disaster scenarios (Yuan et al. 2006; Murray-Tuite 2007).

A similar analysis approach could be adopted for flood scenarios. Sohn (2006), for instance, used a similar approach to the bushfire studies to establish vulnerable links in a regional road network subject to flooding. The NSW SES (Opper et al. 2009) has developed a conceptual model for flood evacuation assessment and planning. The estimation of evacuation timing and duration using this model would benefit greatly from a better understanding of the influence of human behaviour and of realistic road traffic capacity under flood conditions.

Traffic movements on rural road networks need to be studied and modelled with care, because of the unique nature of traffic flows on such roads. On this score, recent developments in traffic flow

modelling for two-way, two-lane roads should prove useful in providing the necessary macroscopic traffic modelling capability. In particular the recent research in France (Laval 2006) and in The Netherlands (Hoogendoorn 2005) is most useful.

The identification of vulnerable links in a network can be undertaken using the recently developed methods for network vulnerability analysis and the determination of critical locations, as described in Jenelius et al. (2006), Taylor (2008) and, Susilawati and Taylor (2008). Modifications to the approach can be made to identify the most resilient links as well as the most vulnerable ones. It is likely that a combination of the criticality and importance metrics introduced by Jenelius et al. (2006) and the area-accessibility-based vulnerability analysis method described by Susilawati and Taylor (2008) – which is firmly embedded in a GIS framework – should produce a valid and practical assessment methodology for network assessment.

Figure 1 outlines a decision support system designed to assist in planning for emergency management and evacuations in the face of a given hazard or natural disaster, based on the availability of models for predicting the intensity and trajectory of a given disaster² for example the Phoenix model for bushfires (Tolhurst et al. 2008).

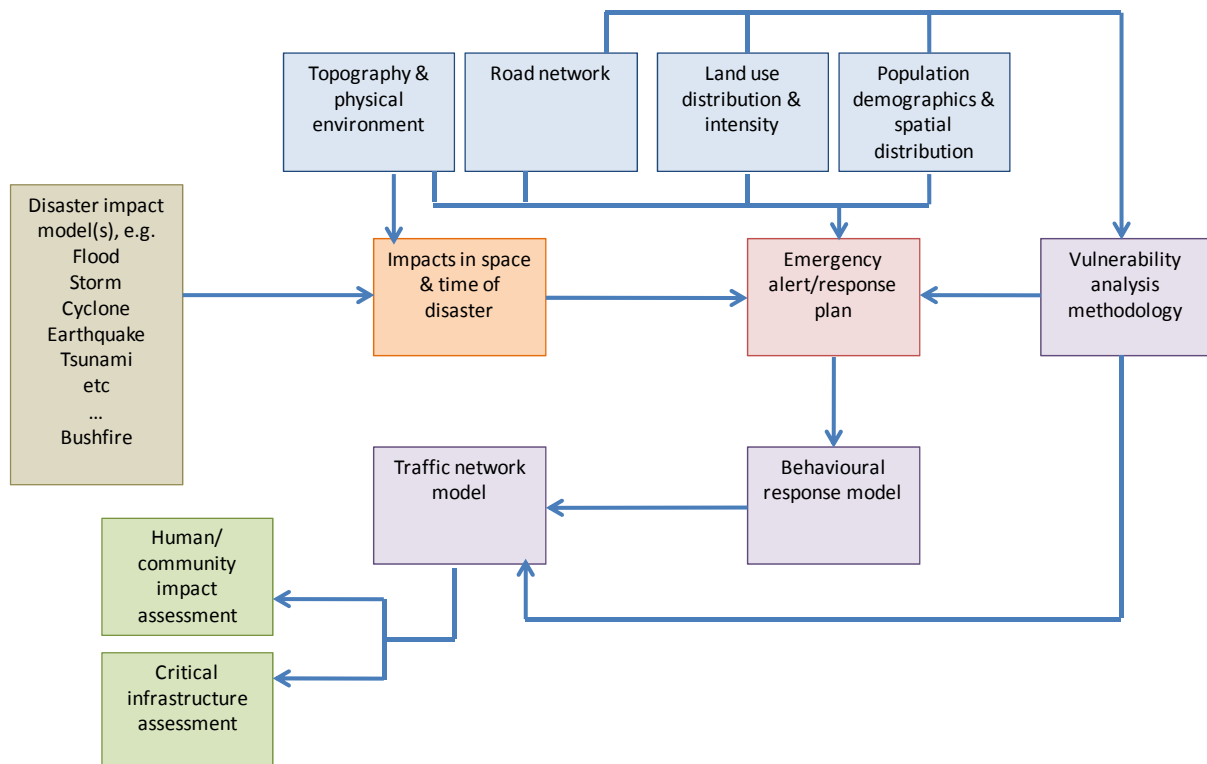


Figure 1 Proposed decision support system for transport aspects of emergency management and evacuation planning

² Noting that not all of the potential natural disasters are attributable to, or influenced by climate change. The decision support system could also be used to consider human generated interventions and disasters, such as terrorist attacks or explosions.

6 Conclusions and research requirements

This paper has outlined the observed and predicted impacts of climate change in Australia. These impacts have then been considered with respect to their implications for transportation infrastructure, systems and travel behaviour. Despite the number of assumptions used to estimate future climate trends, the results clearly indicate a predominantly negative impact on transportation systems and infrastructure. Climate change will have transport specific implications related to design, material selection, operations and management; economic costs; planning systems; liability and insurance; user behaviour; and emergency evacuation, transport network and vehicle efficiencies.

The concept of resilience is proposed as the basis for the development of transport adaptation strategies for climate change. A vulnerability assessment approach is proposed as the method for considering the susceptibility of the network to disruptions or degradation that will significantly reduce the efficiency or capability of the operation of the transport system, and the impacts this degradation could have, in order to plan and prioritise adaptation. Climate change is a global problem with global impacts. However, climate change impacts with respect to transport systems and infrastructure should be investigated at the local or regional scale for a number of reasons including the fact that climate change impacts will vary spatially and the uniqueness of transport infrastructure in each locality.

Decision support systems are proposed as the framework to progress with adaptation planning in a structured, considered manner given the many uncertainties involved with the timing and severity of climate change impacts. These should follow similar specifications as those discussed in Section 5.3.

The decentralised nature of transportation infrastructure ownership, operations and maintenance, and the current governance structures may induce barriers to climate change adaptation. A unified approach is required to develop and implement effective adaptation strategies for Australian transportation infrastructure. This is surely an interest for COAG.

A workshop of key transport professionals in the USA determined that the following set of general approaches were required to facilitate adapting transportation systems and infrastructure to climate change (Winkelman et al. 2009):

- educate the transportation community about the importance of addressing climate change
- top level leadership is needed to provide clarity in policy direction
- climate change focussed partnerships should be developed across all governance levels and include private industry
- increased assistance and guidance is required to grow institutional capacity to deal with climate change
- synergies should be identified among goals and projects being undertaken across all governance levels and private industry
- develop new funding strategies for adaptation projects

These approaches provide insight into the needs of the Australian transportation community in facilitating adaptation of transport systems and infrastructure.

7 References

Adger, WN, Arnell, NW & Tompkins, EL 2005, 'Successful adaptation to climate change across scales', *Global Environmental Change*, vol. 15, pp. 77-86.

Ahola, T, Virrantaus, K, Krisp, JM & Hunter, GJ 2007, 'A spatio-temporal population model to support risk assessment and damage analysis for decision making', *International Journal of Geographical Information Science*, vol. 21, no. 8, pp. 935-953.

Auld, H, MacIver, D & Klaassen, J 2006, *Adaptation options for infrastructure under changing climate conditions*, Occasional Paper 10, Environment Canada, Ontario.

Austroroads 2004, *Impact of climate change on road infrastructure*, Publication AP-R243/04, Austroroads, Sydney, Australia.

Ball, R 2009, 'Climate change and sustainable futures', *Systemic Practice and Action Research* vol. 22, pp. 139-148.

Biesbroek, GR, Swart, RJ, Carter, TR, Cowan, C, Henrichs, T, Mela, H, Morecroft, MD & Rey, D 2010 *in press*, 'Europe adapts to climate change: comparing national Adaptation Strategies', *Global Environmental Change*.

Brown, D, Moin, S & Nicholson, M 1997, 'A comparison of flooding in Michigan and Ontario: soft data to support soft water management approaches', *Canadian Water Resources Journal*, vol. 22, no. 2, pp. 125-139.

Burch, S 2010, 'Transforming barriers into enablers of action on climate change: insights from three municipal case studies in British Columbia, Canada', *Global Environmental Change*, vol. 20, pp. 287-297.

Chapman, L 2007, 'Transport and climate change: a review', *Journal of Transport Geography*, vol. 15, pp. 354-367.

Chini, N, Stansby, P, Leake, J, Wolf, J, Roberts-Jones, J & Lowe, J 2010 *in press*, 'The impact of sea level rise and climate change on inshore wave climate: A case study for East Anglia (UK)', *Coastal Engineering*.

Commonwealth of Australia (CoA) 2010a, *Adapting to climate change in Australia - An Australian Government position paper*, Department of Climate Change, Canberra, Australia.

Commonwealth of Australia (CoA) 2010b, *State of Australian cities*, Commonwealth of Australia, Canberra, Australia.

Council of Australian Governments (COAG) 2007, *National climate change adaptation framework*, http://www.coag.gov.au/coag_meeting_outcomes/2007-04-13/docs/national_climate_change_adaption_framework.pdf accessed 18/05/2010.

CSIRO 2006, *Infrastructure and climate change risk assessment for Victoria*, report by CSIRO and others for the Victorian Government, CSIRO, Aspendale, Australia.

CSIRO & BOM 2007, *Climate change in Australia - observed changes and projections*, Technical Report, CSIRO and Bureau of Meteorology, www.climatechangeinaustralia.gov.au accessed 29/04/2010, CSIRO, Melbourne, Australia.

CSIRO & BOM 2010, *State of the climate 2010*, CSIRO and Bureau of Meteorology, <http://www.bom.gov.au/inside/eiab/State-of-climate-2010-updated.pdf> accessed 11/05/2010.

Dow, K & Cutter, SL 2002, 'Emerging hurricane evacuation issues: Hurricane Floyd and South Carolina', *Natural Hazards Review*, February 2002, pp. 12-18.

Edwards, J 1999, 'The temporal distribution of road accidents in adverse weather', *Journal of Applied Meteorology*, vol. 6, pp. 59-68.

Evans, C, Tsolakis, D & Naude, C 2009, 'Framework to address climate change impacts on road infrastructure assets and operations', paper presented at the 32nd Australasian Transport Research Forum, Auckland, New Zealand, <http://www.patrec.org/atrf.aspx>.

Freeman, S, Taylor, MAP & Holyoak, N 2009, 'Vulnerability analysis of road networks', paper presented at the 32nd Australasian Transport Research Forum, Auckland, New Zealand, <http://www.patrec.org/atrf.aspx>.

Fu, H & Wilmot, CG 2004, 'Sequential logit dynamic travel demand model for hurricane evacuation', *Transportation Research Record: Journal of the Transportation Research Board*, vol. 1882, pp. 19-26.

Fussler, H & Klein, R 2006, 'Climate change vulnerability assessments: an evolution of conceptual thinking', *Climatic Change*, vol. 75, pp. 301-329.

Garnaut, R 2008, *The Garnaut climate change review*, Cambridge University Press, Port Melbourne.

Hamin, E & Gurrán, N 2009, 'Urban form and climate change: balancing adaptation and mitigation in the U.S. and Australia', *Habitat International*, vol. 33, pp. 238-245.

Hoogendoorn, SP 2005, 'Unified approach to estimating free speed distributions', *Transportation Research Part B*, vol. 39, pp. 709-727.

IPCC 2007a, *Climate Change 2007 Pt I: The Physical Science Basis. Contribution of Working Group I to the Fourth Assessment report of the Intergovernmental Panel on Climate Change*, Cambridge University, Cambridge.

IPCC 2007b, *Climate Change 2007 Pt II: Impacts, Adaptation and Vulnerability. Contribution of Working Group II to the Fourth Assessment report of the Intergovernmental Panel on Climate Change*, Cambridge University, Cambridge.

IPCC 2007c, *Climate Change 2007 Pt III: Mitigation. Contribution of Working Group III to the Fourth Assessment report of the Intergovernmental Panel on Climate Change*, Cambridge University, Cambridge.

Jaroszweski, D, Chapman, L & Petts, J 2010, 'Assessing the potential impact of climate change on transportation: the need for an interdisciplinary approach', *Journal of Transport Geography*, vol. 18, pp. 331-335.

- Jenelius, E, Petersen, T & Mattsson, LG 2006, 'Importance and exposure in road network vulnerability analysis', *Transportation Research Part A*, vol. 40, pp. 537-560.
- Jollands, N, Ruth, M, Bernier, C & Golubiewski, N 2007, 'The climate's long-term impact on New Zealand infrastructure (CLINZI) project - a case study of Hamilton City, New Zealand', *Journal of Environmental Management*, vol. 83, pp. 460-477.
- Keay, K & Simmonds, I 2005, 'The association of rainfall and other weather variables with road traffic volume in Melbourne, Australia', *Accident Analysis and Prevention*, vol. 37, pp. 109-124.
- Koetse, M & Rietveld, P 2009, 'The impact of climate change and weather on transport: an overview of empirical findings', *Transportation Research Part D*, vol. 14, pp. 205-221.
- Lakshmanan, T 2010 *in press*, 'The broader economic consequences of transport infrastructure investments', *Journal of Transport Geography*.
- Laval, JA 2006, 'A macroscopic theory of two-lane rural roads', *Transportation Research Part B*, vol. 40, pp. 937-944.
- Lindell, MK & Prater, CS 2007, 'Critical behaviour assumptions in evacuation time estimate analysis for private vehicles: examples from hurricane research and planning', *Journal of Urban Planning and Development*, March 2007, pp. 18-29.
- Litman, T 2006, 'Lessons from Katrina and Rita: what major disasters can teach transportation planners', *Journal of Transportation Engineering*, January 2006, pp. 11-18.
- Luten, K 2006, 'Transportation management associations: Exploring public-private partnerships to enhance travel behaviour change programs', paper presented at the 29th Australasian Transport Research Forum, Gold Coast, Australia, <http://www.patrec.org/atrf.aspx>, September 2006.
- Lynch, A, Nicholls, N, Alexander, L & Griggs, D 2008, *Defining the impacts of climate change on extreme events*, report for the Garnaut Climate Change Review, Monash University, Clayton, Australia.
- Maunsell 2008, *Impact of climate change on Australia's roads and bridge infrastructure*, report for the Garnaut Climate Change Review, Canberra, Australia.
- McLean, R, Tsyban, A, Burkett, V, Codignotto, J, Forbes, D, Mimura, N, Beamish, R & Ittekkot, V 2001, 'Coastal zone and marine ecosystems', in *Climate Change 2001: impacts, adaptation and vulnerability*, eds. J McCarthy, O Canziani, N Leary, D Dokken & K White, Cambridge University Press, Cambridge, pp. 343-380.
- Meyer, M 2008, *Design standards for U.S. transportation infrastructure - the implications of climate change*, Special Report 290, Transportation Research Board, Washington D.C, USA.
- Middlemann, M (ed.) 2007, *Natural hazards in Australia: Identifying risk analysis requirements*, Geoscience Australia, Canberra, Australia.
- Munich Re 2000, *Annual review of natural disasters 1999*, Munich Re Group, Munich, Germany.

Munich Re 2009, *Natural catastrophes 2008: Analyses, assessments, positions*, Australasia/Oceania Volume, Munich Re Group, Munich, Germany.

Munich Re 2010, *Natural catastrophes 2009: Analyses, assessments, positions*, Munich Re Group, Munich, Germany.

Murray-Tuite, P 2007, 'Perspectives of network management in response to unplanned disruptions', *Journal of Urban Planning and Development*, March 2007, pp. 9-17.

Naess, L, Norland, I, Lafferty, W & Aall, C 2006, 'Data and processes linking vulnerability assessment to adaptation decision making on climate change in Norway', *Global Environmental Change*, vol. 16, pp. 221-233.

Ng, A & Loosemore, M 2007, 'Risk allocation in the private provision of public infrastructure', *International Journal of Project Management*, vol. 25, pp. 66-76.

Nicholls, N 2008, *Australian climate and weather extremes: past, present and future*, <http://www.climatechange.gov.au/~media/publications/science/weather-extremes.ashx> accessed 12/05/2010, Canberra, Australia.

Nicholls, R & Lowe, J 2004, 'Benefits of mitigation of climate change for coastal areas', *Global Environmental Change*, vol. 14, pp. 229-244.

NRC 2010, *Adapting to the Impacts of Climate Change*, National Research Council of the National Academies of Sciences, Washington DC, USA.

Opper, S, Cinque, P & Davies, B 2009, 'Timeline modelling of flood evacuation operations', paper presented at the 1st international conference on emergency management, Copenhagen, Denmark.

Philp, M & Taylor, MAP 2010, *Voluntary travel behaviour change and its potential implications for climate change mitigation and adaptation*, ACCARNSI http://www.nccarf.edu.au/settlements-infrastructure/sites/www.nccarf.edu.au/settlements-infrastructure/files/file/ACCARNSI_PositionPaper_VTBC.pdf.

Rowland, B, Davey, J, Freeman, J & Wishart, D 2007, 'Road transport sensitivities to weather and climate change in Australia: a review of climate change effects', paper presented at the 30th Australasian Transport Research Forum, Melbourne, Australia, <http://www.patrec.org/atrf.aspx>.

Sohn, J 2006, 'Evaluating the significance of highway network links under the flood damage: an accessibility approach', *Transportation Research Part A*, vol. 40, pp. 491-506.

Stecker, R, Pechan, A, Steinhauser, JM, Rotter, M, Scholl, G & Eisenack, K 2010, 'Why are utilities reluctant to adapt to climate change?', paper presented at the International Society for Ecological Economics, Germany, August 2010.

Stern, E & Zehavi, Y 1990, 'Road safety and hot weather: a study in applied transport geography', *Transactions of the Institute of British Geographers*, vol. 15, pp. 102-111.

Stern, N 2006, *Stern Review - Economics of Climate Change*, HM Treasury, Cambridge University, Cambridge.

Stevens, L 2008, *Assessment of impacts of climate change in Australia's physical infrastructure*, Australian Academy of Technical Sciences and Engineering (ATSE), Parkville, Australia.

Susilawati & Taylor, MAP 2008, 'An accessibility approach in assessing regional road network vulnerability', paper presented at the 31st Australasian Transport Research Forum, Gold Coast, Australia, <http://www.patrec.org/atrf.aspx>.

Suarez, P, Anderson, W, Mahal, V, & Lakshmanan, T 2005, 'Impacts of flooding and climate change on urban transportation: a systemwide performance assessment of the Boston Metro Area', *Transportation Research Part D*, vol. 10, pp. 231-244.

Taylor, MAP 2008, 'Critical transport infrastructure in urban areas: impacts of traffic incidents assessed using accessibility based network vulnerability analysis', *Growth and Change*, vol. 39, no. 4, pp. 593-616.

Taylor, MAP & D'Este, G 2005, 'An accessibility based method for vulnerability analysis in strategic transport networks', paper presented at the 28th Australasian Transport Research Forum, Sydney, Australia, <http://www.patrec.org/atrf.aspx>.

Taylor, MAP & Freeman, SK 2009, 'A review of planning and operational models used for emergency evacuation situations in Australia', paper presented at the 1st international conference on emergency management, Copenhagen, Denmark.

Tol, RSJ 2002, 'Estimates of the damage costs of climate change - Part 1 benchmark estimates', *Environmental and Resource Economics*, vol. 21, pp. 47-73.

Tolhurst, K, Shields, B & Chong, D 2008, 'Phoenix: development and application of a bushfire risk management tool', *The Australian Journal of Emergency Management*, vol. 23, no. 4, pp. 47-54.

TRB 2008, *Potential impacts of climate change on US transportation, Special Report 290*, Transportation Research Board, Washington, US.

Unrau, D & Andrey, J 2006, 'Driver Response to Rainfall on Urban Expressways', *Transportation Research Record: Journal of the Transportation Research Board*, vol. 1980, no. 2006, pp. 24-30.

USDOT 2002, *The potential impacts of climate change for transportation - Federal Research Partnership Workshop October 2002 Summary and discussion papers*, DOT Center for Climate Change and Environmental Forecasting, Washington, US.

Winkleman, S, Kooshian, C & Bishins, A 2009, *Integrated state and local government policy approaches to transportation and climate change: a summary of the executive peer exchange*, NCHRP Project 08-36 (94), Center for Clean Air Policy for AASHTO, Washington, United States.

Wolshon, B & Meehan, B 2003, 'Emergency evacuation: ensuring safe and efficient transportation out of endangered areas', *TR News*, vol. 224, pp. 3-9.

Yuan, F, Han, LD, Chin, SM & Hwang, H 2006, 'Proposed framework for simultaneous optimization of evacuation traffic destination and route assignments', *Transportation Research Record: Journal of the Transportation Research Board*, vol. 1964, pp. 50-58.